

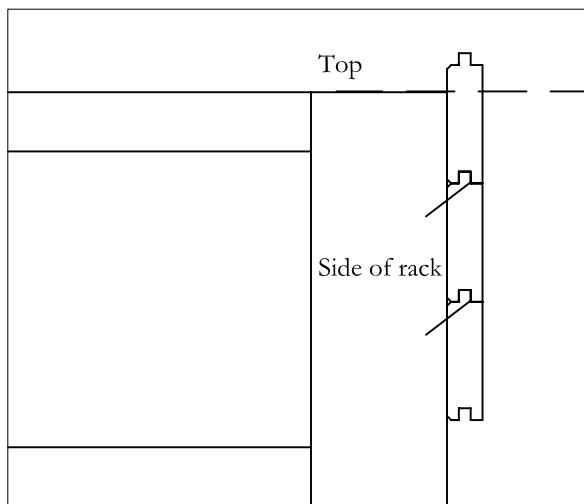


Tongue & Groove Backing

1. If being applied to a rack with spacer bars, rear spacer bars should be eliminated. Use rear spacer bars only for temporary spacing purposes while applying Tongue & Groove.
2. Start at bottom of rack and nail at an angle through the Tongue & Groove into the rack.
3. Mate a second piece of Tongue & Groove into the first piece and nail in place. Continue until back of rack is covered.
4. Plane any excess Tongue & Groove off top piece to make flush with top of unit.

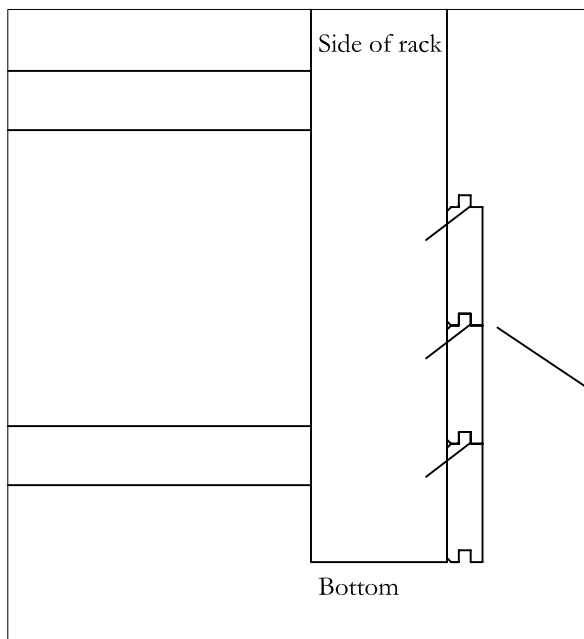

Plane

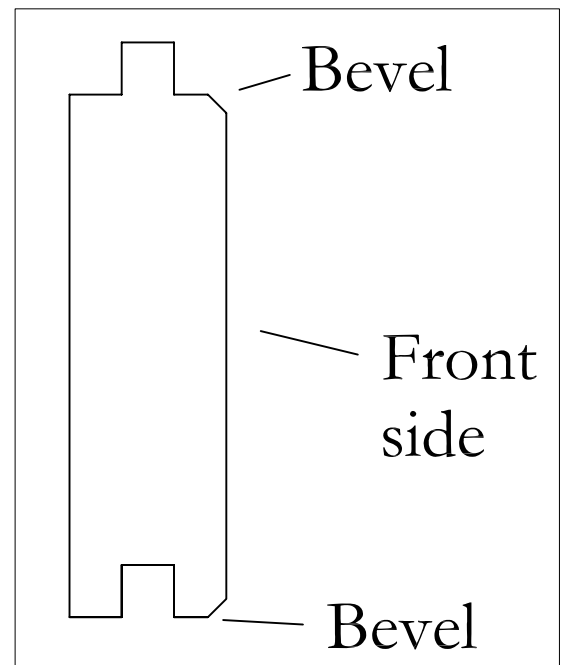

Nail at an angle